

Cooltex[®]
Always Stay Cool

Advanced Ceramic Window Film



Cooltex[®]

Always Stay Cool




Cooltex Window Films are selected from the best raw materials with the latest nano-ceramic technology allowing a clear view and superb heat protection. Cooltex Window Films are manufactured under stringent quality control and zero waste management procedures. This allows us to efficiently produce the best quality window films with great cost savings. We want to make window films affordable for all. Cooltex Window Films come with great varieties catering to different needs and applications. Cooltex Window Films guarantee value for money. We are exporting to over 20 countries across the world.

TYPE OF WINDOW FILMS



Cooltex[®]

Always Stay Cool

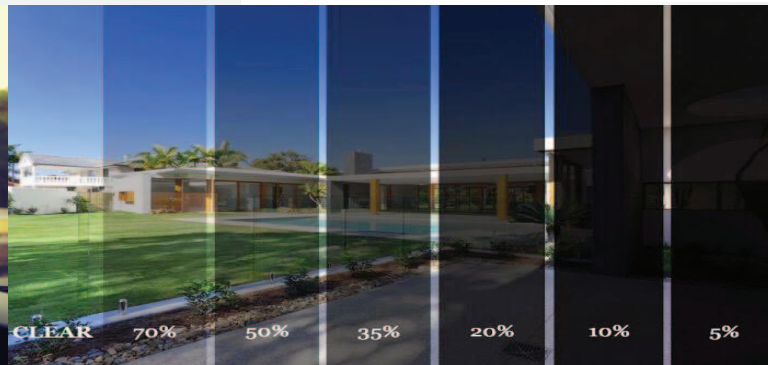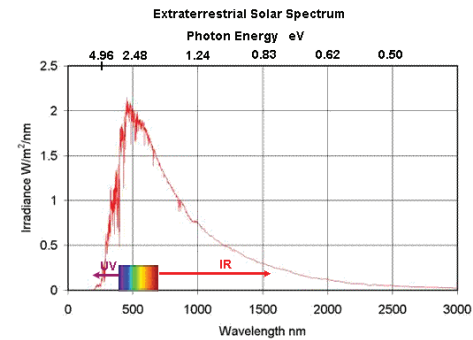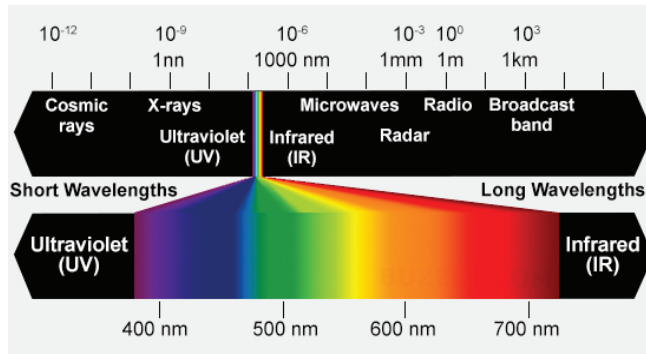

The World of Cooltex Window Films





Product Nomenclature

Series	Code	VLT Visible Light Transmission	GR Glare Reduction	VLR Visible Light Reflectance	IR Infrared Rejection	UV Ultraviolet rejection	SC Shading Coefficient	SHGC Solar Heat Gain Coefficient	TSER Total Solar Energy Rejection
RT	RT - 80G	80%	9%	5%	10%	99%	0.92	80%	nil
	RT - 70G	70%	20%	5%	10%	99%	0.92	80%	nil
	RT - 70BL	70%	20%	5%	10%	99%	0.92	80%	nil
	RT - 60	57%	35%	5%	10%	99%	0.92	80%	nil
	RT - 50	45%	49%	5%	10%	99%	0.92	80%	nil
	RT - 35B	35%	60%	5%	10%	99%	0.80	70%	nil
	RT - 15B	15%	83%	5%	10%	99%	0.69	60%	nil
	RT - 05B	5%	94%	5%	10%	99%	0.67	58%	nil
Nano	Nano 70	68%	23%	5%	30%	99%	0.80	70%	30%
	Nano 60	60%	32%	5%	48%	99%	0.56	49%	51%
	Nano 50	50%	43%	5%	54%	99%	0.54	47%	53%
	Nano 40	35%	60%	5%	53%	99%	0.56	49%	51%
	Nano 20	18%	80%	5%	60%	99%	0.48	42%	58%
	Nano 05	5%	94%	5%	67%	99%	0.38	33%	67%
CTX	CTX 70BL	68%	23%	5%	94%	99%	0.52	45%	55%
	CTX 70	70%	20%	5%	94%	99%	0.52	45%	55%
	CTX 60	60%	32%	5%	70%	99%	0.56	49%	51%
	CTX 50	50%	43%	5%	86%	99%	0.40	35%	65%
	CTX 30	30%	66%	5%	80%	99%	0.29	25%	75%
	CTX 20	20%	77%	13%	80%	99%	0.39	34%	66%
	CTX 05	15%	83%	15%	88%	99%	0.37	32%	68%
N99	N 7599	66%	25%	5%	99%	99%	0.48	42%	58%
	N 6099	60%	32%	8%	99%	99%	0.41	36%	64%
	N 3599	35%	60%	8%	99%	99%	0.36	31%	69%
	N 1599	15%	83%	8%	99%	99%	0.24	21%	79%
	N 0599	5%	94%	8%	99%	99%	0.18	16%	84%
XR	XR 10	10%	89%	20%	80%	99%	0.28	24%	76%
	XG 10	10%	89%	25%	90%	99%	0.28	24%	76%
	Gold	10%	89%	75%	90%	99%	0.25	22%	78%

Cooltex[®]

Always Stay Cool

Window Film Application



Automotive



Architectural



Luxury Yacht



Project Reference



Shopping Mall



Residential



Airport



Embassy



School



Commercial



Packing detail



Commodity	HS Code	Standard Weight	Pallet	Box Dimension
Window Film	3919-90-99	7kg/roll	30 rolls	15mmx15mmx160mm

Cooltex[®]

Always Stay Cool

